MAIN THERAPY DISPLAY

After navigating from the Home menu, the screen on the right will be the main therapy display (content subject to change).

This display is organized in three (3) sections with information relating to the therapy selected for intended use:

1. Navigation Bar
2. Selected Parameters
3. Channel Tab Information

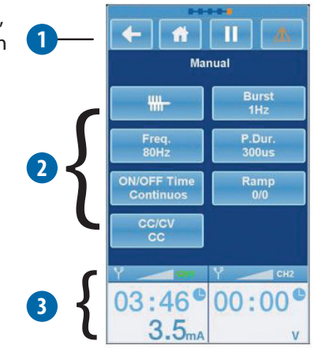

IMPORTANT!

Never remove the self-adhesive electrodes from the skin while the device is turned on!

WARNING: If the electrodes are not placed firmly on the skin or the device has not connected with the lead wires securely, and the output intensity level is equal or greater than 10mA, the intensity will stop automatically.

1 ELECTROTHERAPY TREATMENT SCREEN

1. Electrode Output Indicator
2. Channel Indicator (Channel 1, 2, 3 or 4)
3. Remaining Treatment Time
4. Output Value
5. Unit of Output Value (mA)

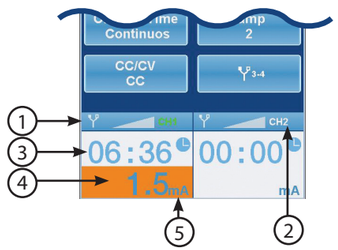

2 HOME SCREEN

- The Home menu gives access to all functions of the unit.
- Select the desired button for the therapy to be used.
- The Electrotherapy menu gives you access to the following functions:
  1. Clinical Protocols
  2. Favorites
  3. Manual Operation
- Select Clinical Protocols button.

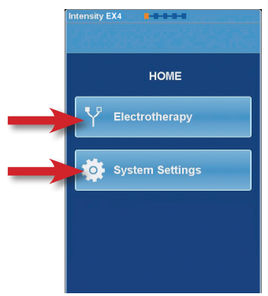

3 ELECTROTHERAPY — CLINICAL PROTOCOLS

- Use the central control dial to scroll through the pages, then select the desired clinical protocol button.
- For more information about the clinical protocol, press the [i] button next to the desired protocol.

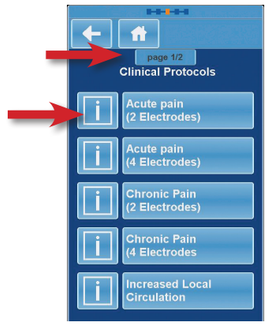

- Use the central control dial to scroll through the information. The last page will show suggested electrode placement.

4 CHANNEL SELECTION

- Select the channels for desired treatment.
- When channel 1 is selected, channel 2, 3 and 4 are still available for another therapy.
- When Channel 1+2 or 3+4 are selected both channels have the same parameters. Only the intensity can be set differently

5 PARAMETERS

- Adjust the parameters by touching the desired parameter button.
- Change the value by rotating the central control dial.
- **Note:** Some parameters have more options to choose from and in the next screen another list appears from which to chose from
- Touch the [3-4] button if you want to switch to parameters of channel 3 & 4.

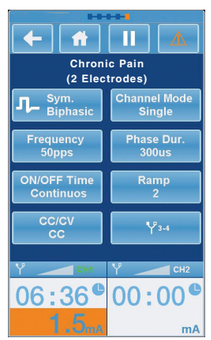

6 TREATMENT TIME ADJUSTMENT

- Touch the timer. The color will change to orange. Adjust the treatment time with the central control dial.

NOTE: If using IF-4P or High Volt current, please consult pages 14 & 18 (respectively) for use of proper electrode size and placement prior to administering therapy.

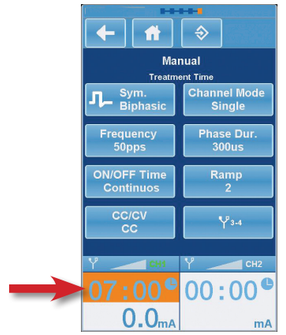

7 START THERAPY

- Once your parameters & timers are set, start the therapy by touching the output intensity on the bottom of the screen. The color will change to orange.
- Use the central control dial to adjust the output level.
- **Note:** The current intensity can only be adjusted after the timer has been set.
- To pause the treatment, touch the pause button [II] in the navigation bar.
- To continue the treatment touch the run button [▶] in the navigation bar.
- To Stop the treatment touch the STOP button [■] in the navigation bar.
- **NOTE:** To restart after pressing stop, you will need to re-enter the treatment time first.

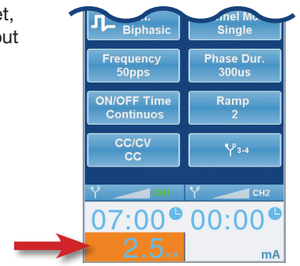

8 FAVORITES

- Please see page 35 of the instruction manual for full details on how to store your personal therapy settings as favorites.



9 ELECTROTHERAPY — MANUAL OPERATION

- See **STEP 2** — Select Electrotherapy then Manual Operation.
- Select the desired current waveform.
- **Note:** Some selections have more options to choose from and in the next screen another list appears from which to choose from.

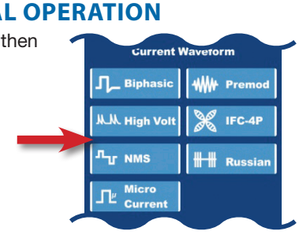

10 CHANNEL SELECTION

- Select the channels for desired treatment.
- When channel 1 is selected, channel 2, 3 and 4 are still available for another therapy.
- When Channel 1+2 or 3+4 are selected both channels have the same parameters. Only the intensity can be set differently

11 PARAMETERS

- Adjust the parameters by touching the desired parameter button.
- Change the value by rotating the central control dial.
- **Note:** Some parameters have more options to choose from and in the next screen another list appears from which to chose from
- Touch the 3-4 button if you want to switch to parameters of channel 3 & 4.

12 TREATMENT TIME ADJUSTMENT

- Touch the timer. The color will change to orange. Adjust the treatment time with the central control dial.

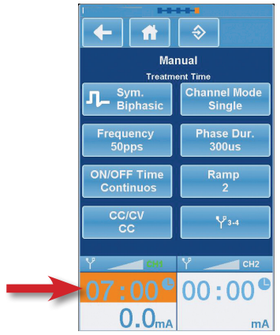

13 START THERAPY

- Once your parameters & timers are set, start the therapy by touching the output intensity on the bottom of the screen. The color will change to orange.
- Use the central control dial to adjust the output level.
- **Note:** The current intensity can only be adjusted after the timer has been set.
- To pause the treatment, touch the pause button in the navigation bar.
- To continue the treatment touch the run button in the navigation bar.
- To Stop the treatment touch the STOP button in the navigation bar.
- **NOTE:** To restart after pressing stop, you will need to re-enter the treatment time first.



ROSCOE MEDICAL Better Living™

Manufactured for:
Roscoe Medical
21973 Commerce Parkway
Strongsville, Ohio 44149
Ph: (800) 3-ROSCOE (376-7263)
www.roscoemedical.com

InTENSity™ EX4

ROSCOE MEDICAL Better Living™

Model: DQ7000

QUICK REFERENCE GUIDE

The purpose of this guide is to assist you in correctly operating your *InTENSity™ EX4 Professional Series Device* (DQ7000). This device should only be used under the continued supervision of a licensed physician. This guide is not intended to replace or substitute the *InTENSity™ EX4* Instruction Manual. **PLEASE READ THE INSTRUCTION MANUAL COMPLETELY BEFORE USING THIS DEVICE.** Read, understand and practice the IMPORTANT SAFETY PRECAUTIONS AND WARNINGS found on pages 5 — 12 of your user manual.

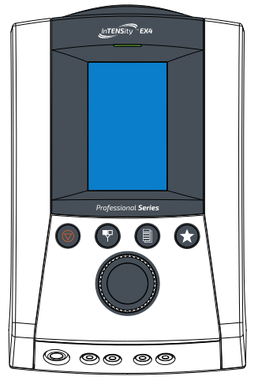

2" x 2" Electrodes (4/pk)	2
2" x 3.5" Electrodes (4/pk)	2
3" x 5" Dispersive Electrode (2/pk)	1
2.5" x 3.5" Rubber Electrode (4/pk)	1
2.75" x 4.3" Rubber Electrode (4/pk)	1
3" x 47" Strap for Rubber Electrodes	2
3" x 23.5" Strap for Rubber Electrodes	2
78" Lead Wires (2/bag)	2
Medical Grade Power Cord	1
Patient Kill Switch	1
Manual	1
Quick Start Guide	1
CD with Electronic Manual	1

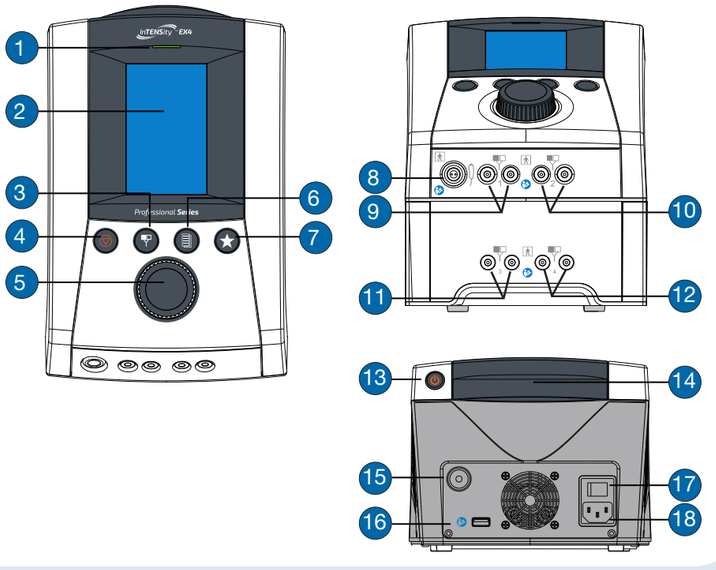

1. Power LED Indicator
2. Touch Screen Display
3. Electrotherapy Button
4. Patient Kill Switch Button
5. Central Control Dial
6. Clinical Protocols Button
7. Favorites Button
8. Remote Kill Switch Connection
9. Ch. 1 Lead Wire Connection
10. Ch. 2 Lead Wire Connection
11. Ch. 3 Lead Wire Connection
12. Ch. 4 Lead Wire Connection
13. Power Button
14. Carry Handle
15. Grounding Test Post
16. USB Diagnostics Port*
17. On/Off Switch
18. Power Cord Connection